



0400
0420/030
367.39104X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): W. D'SOUZA
Serial No.: 09/684,949
Filed: October 10, 2000
Title: A PORTABLE ELECTRONICS DEVICE

LETTER CLAIMING RIGHT OF PRIORITY

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

November 21, 2000

Sir:


Under the provisions of 35 USC 119 and 37 CFR 1.55, the
applicant(s) hereby claim(s) the right of priority based on:

Great Britain Patent Application No. 9923957.6
Filed: October 8, 1999

A certified copy of said Great Britain Patent Application is
attached.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



Carl I. Brundidge
Registration No. 29,621

CIB/ssr
Attachment

This Page Blank (uspto)



USA



INVESTOR IN PEOPLE

CERTIFIED COPY OF PRIORITY DOCUMENT




The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

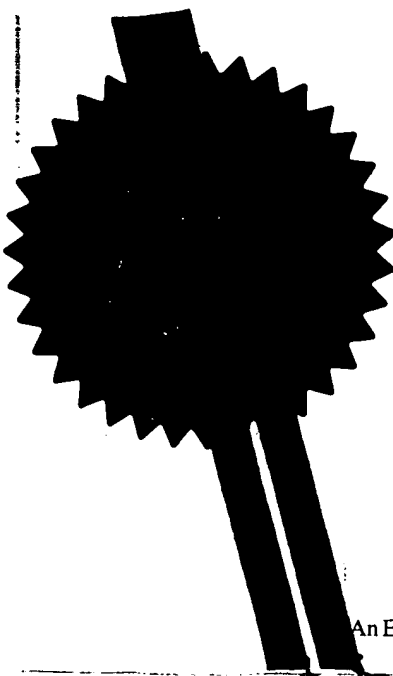

Signed

[Handwritten signature]


Dated 17 October 2000

This Page Blank (uspto)

Statement of inventorship and of
right to grant of a patent

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

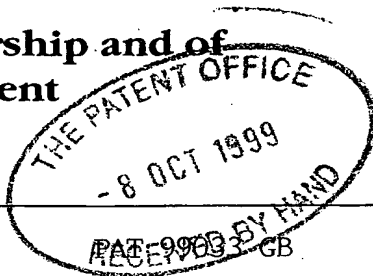

1. Your reference

2. **9923957.6**

8 OCT 1999

3. Full name of the or of each applicant

NOKIA MOBILE PHONES LIMITED

4. Title of the invention

A PORTABLE ELECTRONICS DEVICE

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent

BY VIRTUE OF SECTION 7(2)(c).

6. How many, if any, additional Patents Forms
7/77 are attached to this form?
(see note (c))

7.

I/We believe that the person(s) named over the page (and on
any extra copies of this form) is/are the inventor(s) of the invention
which the above patent application relates to.

Signature

Date

JULIET HIBBERT

8.10.99

8. Name and daytime telephone number of
person to contact in the United Kingdom

Miss J Hibbert 01252 865101

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames.

WINAND D'SOUZA
1 Guerdon Place
Bracknell
RG12 7FH

7757412001

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Patents ADP number (if you know it):

Reminder

Have you signed the form?


11OCT99 E483073-1 D02716
P01/7700 0.00 - 9923957.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

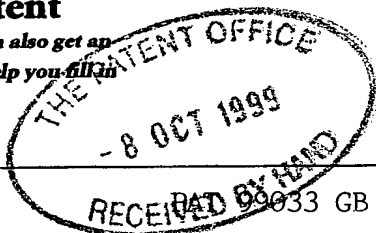

1. Your reference

2. Patent
(The Pat

9923957.6

- 8 OCT 1999

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

FINLAND

7406747001 A

4. Title of the invention

A Portable Electronics Device

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU14ONG UK

Patents ADP number (if you know it)

2577638001 A

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right
to grant of a patent required in support of
this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an
applicant, or
- c) any named applicant is a corporate body.

YES

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

9
2
1
4 + 4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(*please specify*)

11.

I/We request the grant of a patent on the basis of this application.

Signature

JULIET HIBBERT

Date

8.10.99

12. Name and daytime telephone number of person to contact in the United Kingdom

Miss J Hibbert 01252 865101

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

Portable electronics device

5 This invention relates to a portable electronics device incorporating an electro-acoustic transducer.

A transducer is a device that converts energy from one medium to another. The invention is particularly directed to an electro-acoustic transducer, which converts an electrical signal into an acoustic signal.

10

In accordance with the invention there is provided a portable device comprising: a housing having a first surface with an outlet for the egress of an acoustic signal when in a loudspeaker mode and a second surface with an outlet for the egress of an acoustic signal when in the earpiece mode; and an
15 electro-acoustic transducer located within the housing for converting an electrical signal input to the transducer into an acoustic signal, the transducer being operable to output acoustic signals when in the loudspeaker mode or the earpiece mode, the audio path between the transducer and the outlet for the egress of an acoustic signal when in the loudspeaker mode being less
20 attenuated than the audio path between the transducer and the outlet for the egress of an acoustic signal when in the earpiece mode.

Such an arrangement means that a single transducer may be used for providing both the loudspeaker mode (i.e. an acoustic output at a level
25 suitable for listeners in the general vicinity of the device) and the earpiece mode (i.e. an acoustic output at a level suitable for a single listener with the device near to the listener's ear), which therefore saves space within the device. In addition, the higher attenuation between the earpiece outlet and the transducer relative to that between the loudspeaker outlet and the
30 transducer means that a user who places the earpiece outlet to their ear

whilst the device is in loudspeaker mode will be subjected to a quieter output than that from the loudspeaker outlet.

5 The invention has particular application to communications devices which incorporate telephony functionality but is also applicable to other portable devices which may operate in a "personal" earpiece mode and a loudspeaker mode (e.g. a personal stereo).

10 The device may incorporate a first housing and a second housing coupled together in a moveable manner. Preferably the device further includes a detector for detecting the position of one housing relative to the other and for operating the gain control switch accordingly.

15 A mechanical attenuator may be provided between the transducer and the outlet for the egress of the acoustic signal when in the earpiece mode.

20 The device may also include an amplifier for amplifying the electrical signal prior to its input to the transducer and a gain control for controlling the gain of the amplifier. The gain control is preferably operable to increase the gain of the amplifier when the device is to operate in a loudspeaker mode relative to the gain of the amplifier when the device is in an earpiece mode. Preferably the difference in gain between the two modes is around 30 dB.

25 The invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Figure 1 shows a first embodiment of a portable device in accordance with the invention;

Figure 2 shows a cross-sectional view along line A-A of the device shown in Figure 1;

30 Figure 3 is a schematic diagram of the electronic components of the device in accordance with the invention;

Figure 3a is an exemplary gain control circuit;

Figure 4 shows a side view of a second embodiment of a device according to the invention having a hinged portion, the device being in a closed position;

Figure 5 shows the device of Figure 4 in an open position;

Figure 6 shows a third embodiment of a device according to the invention;

5 and

Figure 7 shows the device of Figure 7 in an open position.

As shown in Figure 1, a portable communications device 2 according to a first embodiment of the invention generally incorporates a main housing 20. The main housing has a front face 201, a rear face 202, side faces 204a,b, a upper side face 206 which forms the top of the device and a lower side face 208 which forms the bottom side of the device. The device has a display 22, a user input device in the form of an alphanumeric keypad 23 and an antenna 26. The front face 201 of the housing has an inlet 24 for the ingress of an acoustic signal to a microphone and an outlet 25 for the egress of an acoustic signal from an earpiece to a user's ear. The rear face 202 of the housing has an outlet 27 (see Figure 2) for the egress of an acoustic signal when the device is used in a loudspeaker, or so-called hands-free, mode. The device includes a button 21 with which a user selects the hands-free mode.

20

Figure 2 shows a cross-sectional view along the line A-A of the device shown in Figure 1. The device includes a multi-functional electro-acoustic transducer 28. The transducer is multi-functional in that it provides the acoustics for at least the hands-free mode and the earpiece mode. The transducer may be a loudspeaker. The transducer may also provide buzzer and/or vibrating functions. An example of such a transducer 28 is the CMS-ISA multifunction transducer from Citizen™. This transducer provides earpiece, hands-free, buzzer and vibration functions.

30 The transducer 28 is provided adjacent the outlet 27 so as to provide a relatively unimpeded acoustic path from the transducer to the outlet 27 compared with the acoustic path from the transducer to the outlet 25. The

face of the transducer that provides the major acoustic output faces the outlet 27. Preferably the transducer is attached directly to the inside surface of the rear face 202 of the housing, adjacent the outlet 27.

5 The acoustic path from the transducer to the earpiece outlet 25 is restricted so as to output an attenuated acoustic signal from the earpiece outlet 25. This may be achieved by restricting the open area of the aperture 30 and outlet 25. Typically the area of the aperture 30 and the outlet 25 is significantly smaller than the open area of the hands-free outlet 27. A printed
10 circuit board (PCB) 29, on which are mounted the electronics of the device, is housed within the housing 20 and generally between the transducer 28 and the earpiece outlet 25. An aperture 30 is formed in the PCB 29 on a level with the earpiece outlet 25, to provide a restricted acoustic path 31 from the rear of the transducer 28 to the earpiece outlet 25.

15 An acoustic attenuator 32 may be provided adjacent the earpiece 25 to attenuate the acoustic signal from the transducer 28 to a level suitable for the earpiece.

20 Thus a single transducer may be used to provide both the output to the earpiece outlet 25 and the hands-free outlet 27. The audio path from the transducer 28 to the earpiece outlet 25 is designed so as to attenuate the audio output from the transducer sufficiently compared with the audio output which reaches the hands-free outlet 27.

25 Figure 3 is a schematic illustration of the phone 2. The phone 2 has the previously described antenna 26, hands-free button 21, input device (keypad) 23, microphone 24, display 22, and transducer 28. In addition the phone has a processor 33, a transceiver 34 and a memory 35. The antenna 26 is
30 connected to the transceiver 34. The transceiver has reception circuitry for receiving radio frequency signals encoded with data. It processes the received signals as is known in the art to provide the data in digital form to the

processor 33. This data may be a voice message or part of a phone conversation in which case the processor controls the transducer 28 to provide an audible output to the user. Alternatively the data may be part of an alphanumeric message in which case the processor 33 is operable to provide
5 the message on the display. The transceiver has transmission circuitry which is provided with digital data from the processor 33 which may have been input via the microphone 24 or via the input device 23 as alphanumeric characters. The transmission circuitry produces radio frequency signals encoded with that data. The processor is connected to memory 35 to which it can write and from
10 which it can read. The memory 35 typically stores software, which controls the functioning of the processor and the phone. In particular the software controls how the processor responds to inputs and what outputs it provides.

The processor is connected to the display 22 and to the transducer 28. It
15 controls the output provided by these devices.

The processor is arranged to receive an input from the microphone 24, the input device (keypad) 23, an on/off button (not shown), and the hands-free button 21.

20

As shown in Figure 3, when the button 21 is operated to select hands-free, a gain control signal is sent from the processor 33 to a power amplifier 36. This increases the gain of the power amplifier 36 and so increases the amplitude of the acoustic signal output by the transducer 28. Typically the difference in
25 gain between the earpiece mode and the hands-free mode is around 30 dB. When the user de-selects the hands-free mode, by operating the key 21, the gain control signal is switched off so reducing the gain of the power amplifier 36.

30 Figure 3a shows in more detail an example of a gain control circuit associated with the transducer 28. The feed back loop of the power amplifier 36 comprises two resistors 361, 362 and a switch 363. When the gain of the

power amplifier is to be increased, the gain control signal from the processor 33 causes the switch 363 to close and so connect resistor 362 into the feedback loop.

- 5 Figures 4 and 5 illustrate a second embodiment of a portable communications device in accordance with the invention. The phone has a body portion 42 and a cover portion 40 connected by a hinge 44. The cover is movable between a closed position as illustrated in Figure 4 and an open position as illustrated in Figure 5.

10

The body portion 42 includes a back face 421 which forms the back of the phone, lateral side faces 422a and 422b which form the sides of the phone, an upper side face 424 which forms the top side of the phone, a lower side face 426 which forms the bottom side of the phone, and a front face 428 which is exposed when the cover is in the open position and concealed when the cover is in the closed position. The body has: an antenna 26 on its upper side face 424; a microphone 24 on its lower side face 426; and a display 22, a user input device 23 and a hands-free button 21 on its front face 428. The button may be actuated by a user.

20

The cover portion 40 has an exterior surface 402, which is accessible when the cover is in the closed position, and an interior surface 404, which is inaccessible when the cover is in the closed position but is exposed when the cover is in the open position. The transducer 28 is provided in the cover 40 and the display is provided in the body 42. The cover portion has on its exterior surface 402 an outlet 27 for the hands-free acoustics. The cover portion has on its interior surface 404 an outlet 25 for the earpiece acoustics.

As in the first embodiment, the acoustic path from the transducer 28 to the earpiece outlet 25 is attenuated more than that from the transducer 28 to the hands-free outlet 27. In the example shown this is achieved by the total open area of the outlet 25 being less than that of the total open area of the outlet

30

27. Again apertures in the PCB between the transducer and the earpiece outlet may attenuate the acoustic output from the transducer.

As in the first embodiment a key 21 may be provided for the user to select hands-free mode. A gain control signal is generated in response to a user selecting hands-free mode by pressing the hands-free button 21. Additionally or alternatively a gain control signal may be generated in response to the output of a detector 48. This detector 48 comprises a contact 48a on the inner surface of the first housing 40 and a contact 48b on the inner surface of the second housing 42. When the two contacts 48a, 48b are in contact (as shown in Figure 4) the device is arranged to be in hands-free mode and when the contacts are not in contact (as shown in Figure 5) the device is arranged to be in earpiece mode. Thus, when the device is closed, as shown in Figure 4, the switch 363 is closed. The gain of the power amplifier is therefore increased and hence the output of the transducer is increased to a level suitable for hands-free operation.

When the device is opened, as shown in Figure 5, the contacts 48a, 48b separate, so causing the switch 363 to change position and so switch out the extra gain. The gain to the power amplifier 36 is therefore decreased and so the amplitude of the output of the transducer is decreased.

Preferably the hands-free key 21 is arranged so that a user may use this key 21 to over-ride the detector 48 and select hands-free when the device is in the open position. This may be useful if a user wishes to use other functions of the phone (e.g. calendar, notebook etc.) when the device is in a position in which earpiece mode is the default.

An aperture 45 is provided in the cover 40 to allow a user to view the display 22 when the device is closed. The aperture is positioned and sized so that when the cover is in the closed position at least a portion of the display 22 is

visible through the aperture 45 to the user. The aperture may be covered with a transparent material to allow the user to see the portion of the display 22.

When the cover is in the closed position the interior surface 404 of the cover 40 abuts with the front face 428 of the body 42. The cover is arranged and sized to enclose the input device 23 and display 22 to prevent access by the user. A portion of the display 22 may, however, be viewed by a user through the aperture 45.

When the cover is in the open position the front face 428 of the body and the interior surface 404 of the cover 40 form an oblique angle of between 135 and 175 degrees. In this configuration the whole of the display 22 is exposed, the user input device 23 is exposed and the microphone 24 on the lower side face 426 of the body 42 and the outlet 25 on the interior surface 404 of the cover 40 are at their maximal separation.

A button (not illustrated) may be provided to open the cover, for instance by mechanical action. The natural or low energy configuration for the phone is when the cover is open. The cover is biased to be in the open position. When a user closes the cover, the cover is rotated on its hinge 44 against that bias and the cover 40 and body 42 are brought into contact. The cover 40 is latched in this closed position. Activating the open cover button releases the latch and the cover springs open.

Figures 6 and 7 show a further embodiment of a device according to the invention. Such a device is similar to the Communicator range of portable communications devices, in which the device is usually in earpiece mode when the device is closed and in hands-free mode when the device is open. The device of Figure 6 differs from that shown in Figure 4 in that the outlet 25 for the earpiece mode is provided in the outer surface 402 of the cover 40 and the outlet 27 for the hands-free mode is provided in the inner surface 404 of the cover 40. A gain control signal is generated (either in response to a

detector 48 or in response to user actuation of the hands-free key 21) when the device is open and not when the device is closed. Thus the device defaults to earpiece mode when the device is closed.

- 5 Although devices in which the cover and the body are coupled together in a hinged manner have been described, the invention is also applicable to devices having two housings connected together in other moveable manners, e.g. housings which slide relative to each other.
- 10 The present invention may include any novel feature or combination of features disclosed herein either explicitly or implicitly or any generalisation thereof irrespective of whether or not it relates to the present claimed invention or mitigates any or all of the problems addressed. In view of the foregoing description it will be evident to a person skilled in the art that various
- 15 modifications may be made within the scope of the invention. For instance, although a telecommunications device has been described the invention is applicable to any device in which a transducer is used to provide both the loudspeaker mode and the earpiece mode.

CLAIMS

1. A portable device comprising:
 - a housing having a first surface with an outlet for the egress of an acoustic signal when in a loudspeaker mode and a second surface with an outlet for the egress of an acoustic signal when in the earpiece mode;
 - an electro-acoustic transducer located within the housing for converting an electrical signal input to the transducer into an acoustic signal, the transducer being operable to output acoustic signals when in the loudspeaker mode or the earpiece mode, the audio path between the transducer and the outlet for the egress of an acoustic signal when in the loudspeaker mode being less attenuated than the audio path between the transducer and the outlet for the egress of an acoustic signal when in the earpiece mode.
2. A device according to any preceding claim wherein an attenuator is provided between the transducer and the outlet for the egress of the acoustic signal when in the earpiece mode.
3. A device according to claim 1 or 2 further comprising an amplifier for amplifying the electrical signal prior to inputting to the transducer and a gain control for controlling the gain of the amplifier, the gain control being operable to increase the gain of the amplifier when the device is to operate in a loudspeaker mode relative to the gain of the amplifier when the device is in an earpiece mode.
4. A device according to claim 1, 2 or 3 including a first housing and a second housing coupled together in a moveable manner, the device further comprising a detector for detecting the position of one housing relative to the other and for operating the gain control switch accordingly.
5. A device according to any preceding claim wherein the difference in gain between the two modes is around 30 dB.

6. A device according to any preceding claim wherein the device is a portable communications device.

7. A portable telecommunications device comprising:

5 a housing having a first surface with an outlet for the egress of an acoustic signal when in a hands-free mode and a second surface with an outlet for the egress of an acoustic signal when in the earpiece mode;

an electro-acoustic transducer located within the housing for converting an electrical signal input to the transducer into an acoustic signal, the
10 transducer being operable to output acoustic signals when in the hands-free mode or the earpiece mode, the audio path between the transducer and the outlet for the egress of an acoustic signal when in the hands-free mode being less attenuated than the audio path between the transducer and the outlet for the egress of an acoustic signal when in the earpiece mode.

ABSTRACT

A portable device comprising a housing and an electro-acoustic transducer. The housing has a first surface with an outlet for the egress of an acoustic signal when in a loudspeaker mode and a second surface with an outlet for the egress of an acoustic signal when in an earpiece mode. The electro-acoustic transducer is located within the housing and converts an electrical signal input to the transducer into an acoustic signal. The transducer is operable to output acoustic signals when in the loudspeaker mode or the earpiece mode, the audio path between the transducer and the outlet for the egress of an acoustic signal when in the loudspeaker mode being less attenuated than the audio path between the transducer and the outlet for the egress of an acoustic signal when in the earpiece mode.

1/4

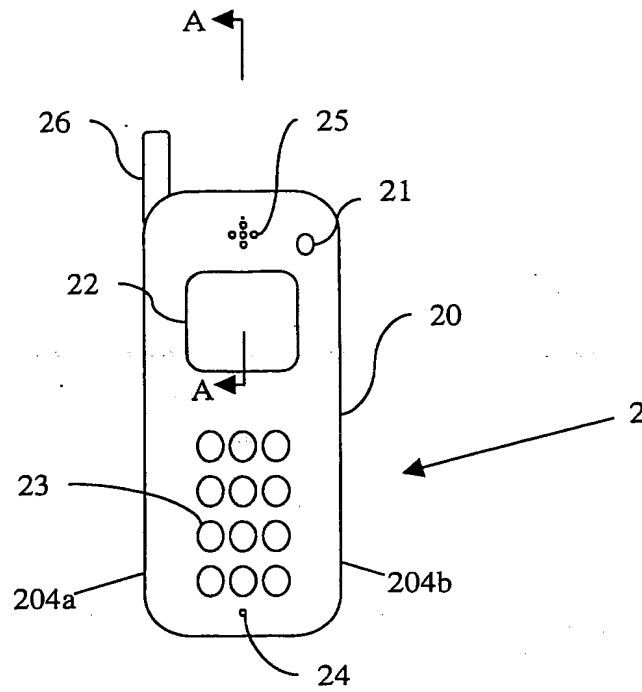


FIG 1

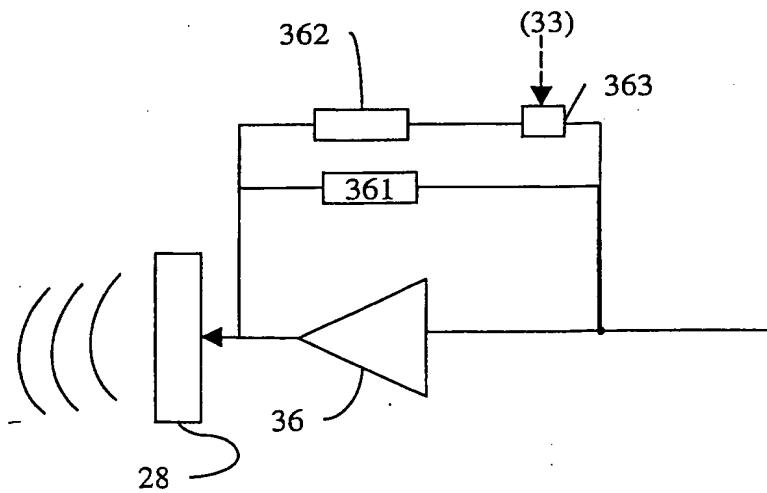


FIG 3a

This Page Blank (uspto)

2/4

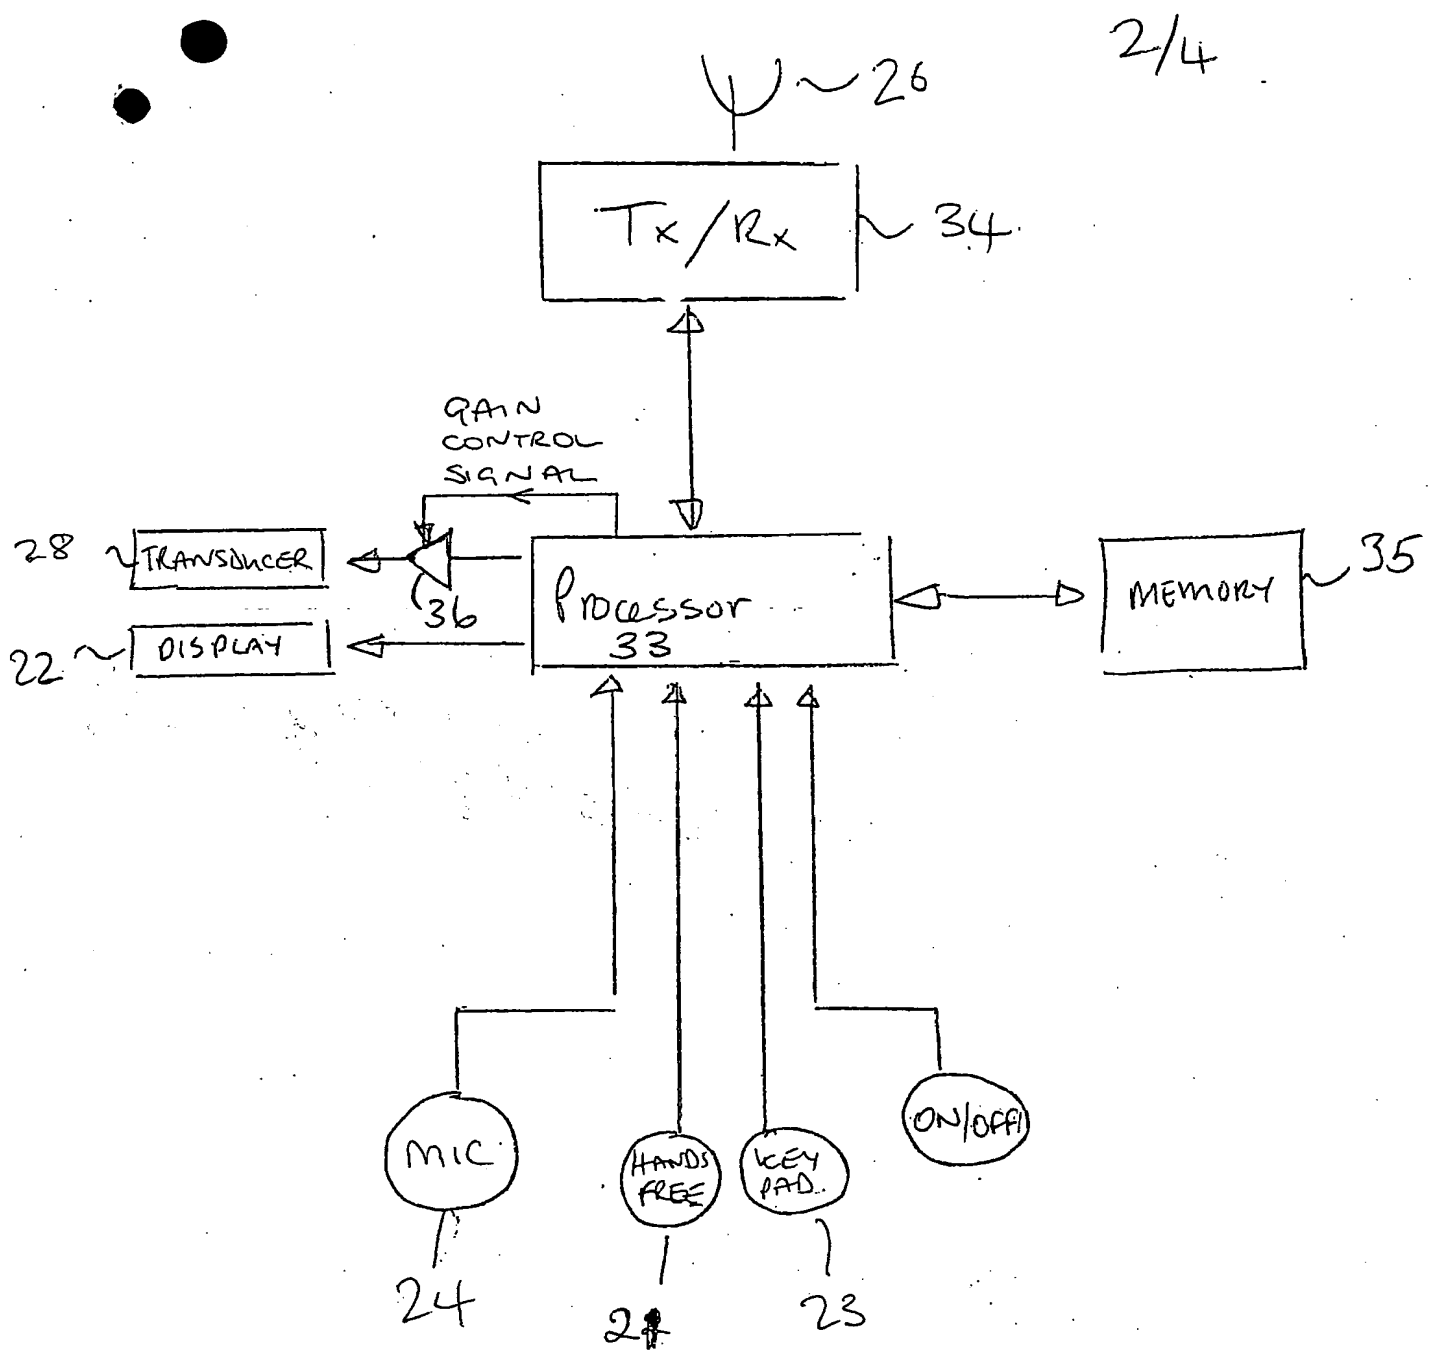


Fig 3

This Page Blank (uspto)

3/4

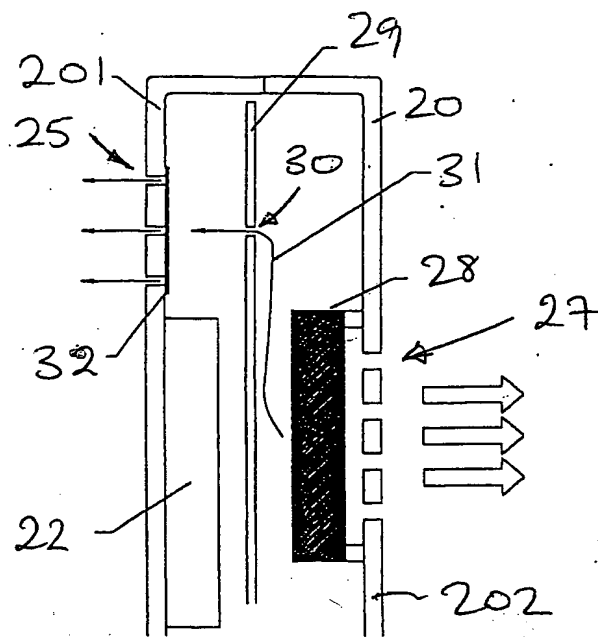


Fig. 2

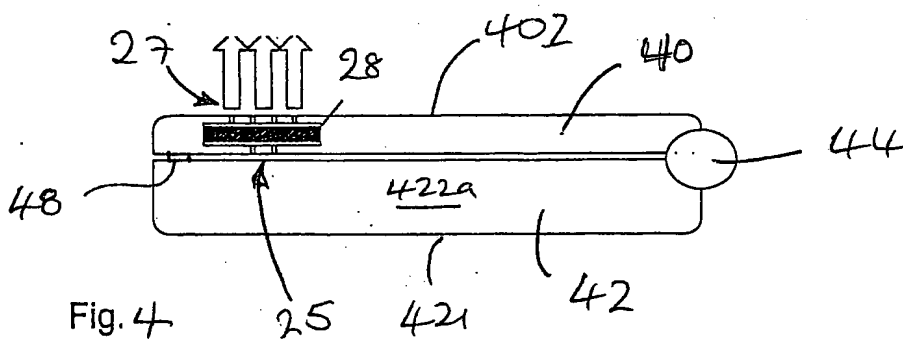


Fig. 4



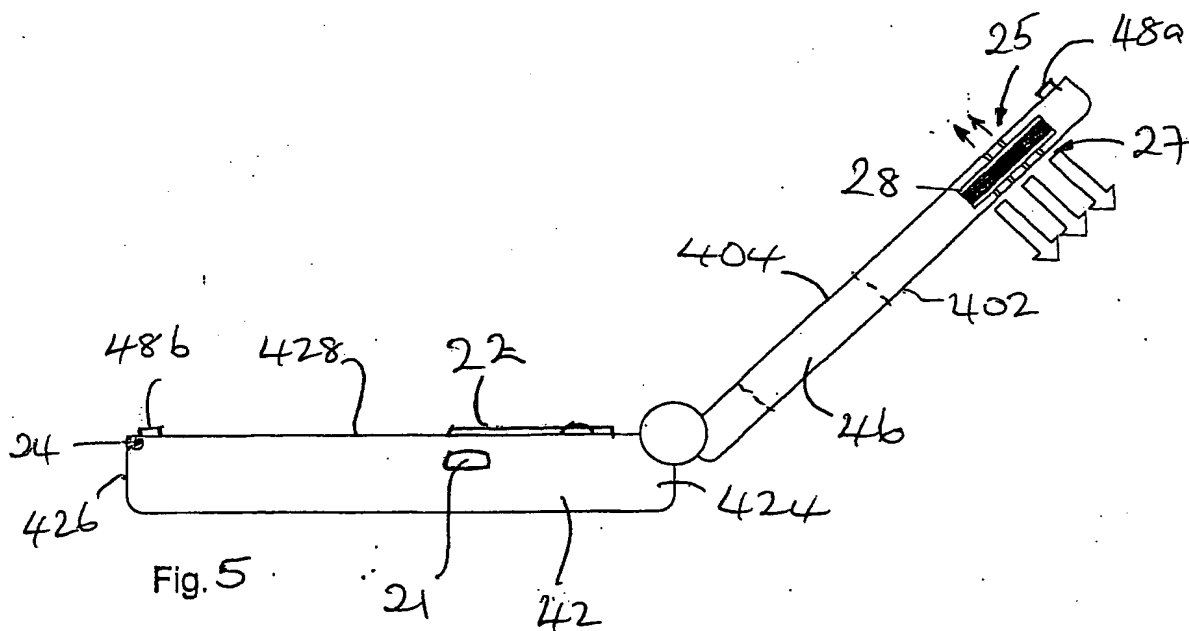


Fig. 5

This Page Blank (uspto)

4/4

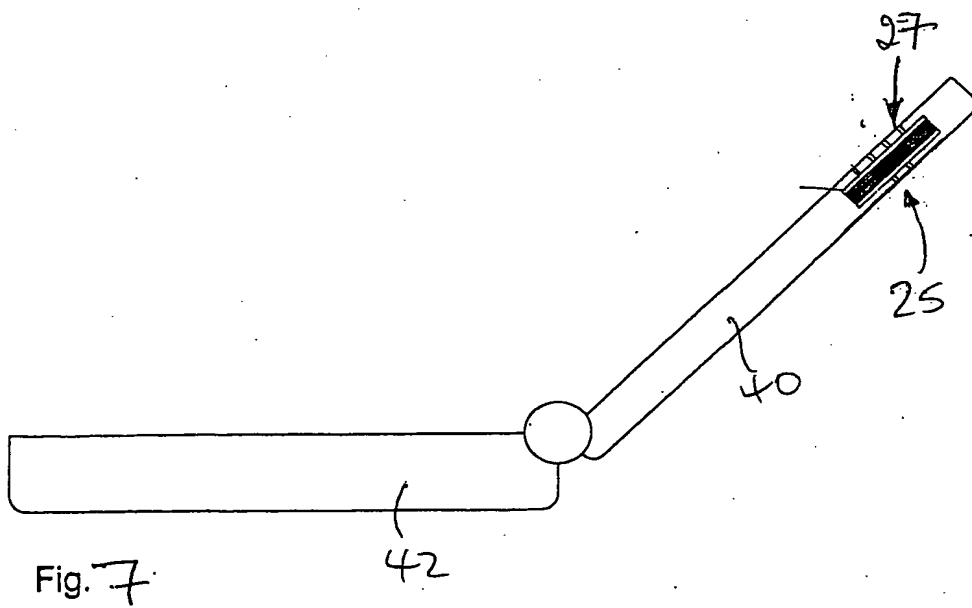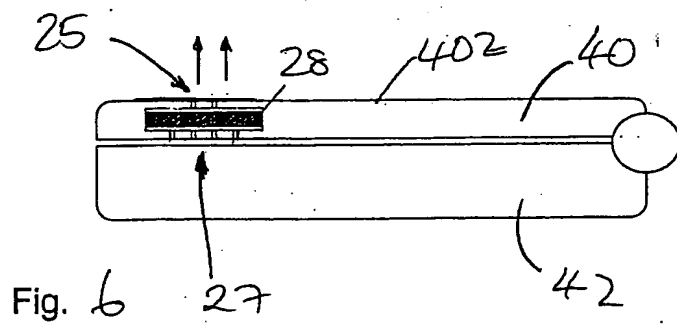

This Page Blank (uspto)